


4-point contact ball slewing bearing without gear

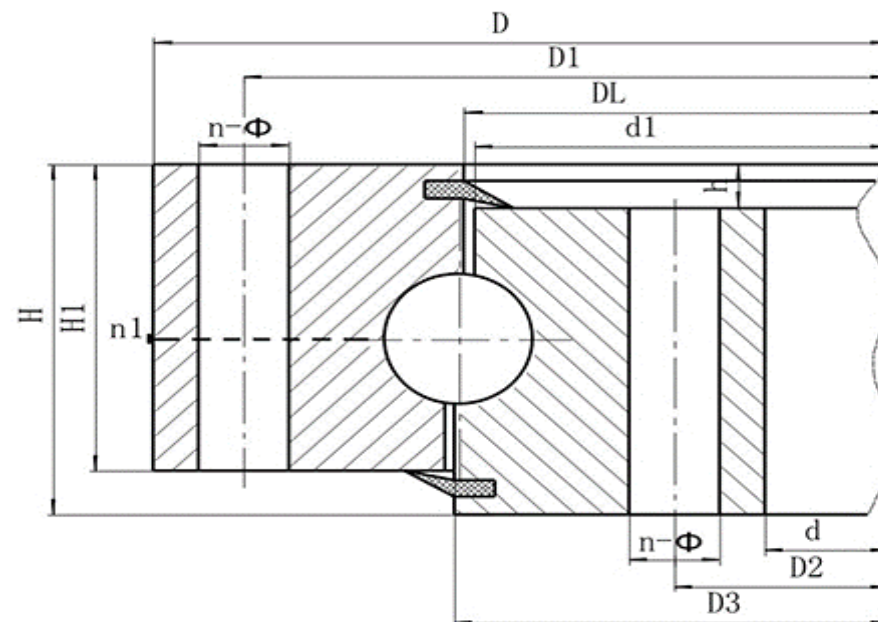

Part number	Dimensions (mm)			Mounting dimensions (mm)								Mass kg
	D	d	H	D1	D2	n	n1	D3	d1	H1	h	
010.20.280	360	200	60	328	232	18-Ø16	2	281	279	50	10	24
010.25.315	408	222	70	372	258	20-Ø18	2	316	314	60	10	37
010.25.355	448	262	70	412	298	20-Ø18	2	356	354	60	10	45
010.25.400	493	307	70	457	343	20-Ø18	2	401	399	60	10	50
010.25.450	543	357	70	507	393	20-Ø18	2	451	449	60	10	55
010.30.500	602	398	80	566	434	20-Ø18	4	501	498	70	10	85
010.25.500	602	398	80	566	434	20-Ø18	4	501	499	70	10	85
010.30.560	662	458	80	626	494	20-Ø18	4	561	558	70	10	95
010.25.560	662	458	80	626	494	20-Ø18	4	561	559	70	10	95
010.30.630	732	528	80	696	564	24-Ø18	4	631	628	70	10	110
010.25.630	732	528	80	696	564	24-Ø18	4	631	629	70	10	110
010.30.710	812	608	80	776	644	24-Ø18	4	711	708	70	10	120
010.25.710	812	608	80	776	644	24-Ø18	4	711	709	70	10	120
010.40.800	922	678	100	878	722	30-Ø22	6	801	798	90	10	220
010.30.800	922	678	100	878	722	30-Ø22	6	801	798	90	10	220

010.40.900	1022	778	100	978	822	30-Ø22	6	901	898	90	10	240
010.30.900	1022	778	100	978	822	30-Ø22	6	901	898	90	10	240
010.40.1000	1122	878	100	1078	922	36-Ø22	6	1001	998	90	10	270
010.30.1000	1122	878	100	1078	922	36-Ø22	6	1001	998	90	10	270
010.40.1120	1242	998	100	1198	1042	36-Ø22	6	1121	1118	90	10	300
010.30.1120	1242	998	100	1198	1042	36-Ø22	6	1121	1118	90	10	300
010.45.1250	1390	1110	110	1337	1163	40-Ø26	5	1252	1248	100	10	420
010.35.1250	1390	1110	110	1337	1163	40-Ø26	5	1251	1248	100	10	420
010.45.1400	1540	1260	110	1487	1313	40-Ø26	5	1402	1398	100	10	480
010.35.1400	1540	1260	110	1487	1313	40-Ø26	5	1401	1398	100	10	480
010.45.1600	1740	1460	110	1687	1513	45-Ø26	5	1602	1598	100	10	550
010.35.1600	1740	1460	110	1687	1513	45-Ø26	5	1601	1598	100	10	550
010.45.1800	1940	1660	110	1887	1713	45-Ø26	5	1802	1798	100	10	610
010.35.1800	1940	1660	110	1887	1713	45-Ø26	5	1801	1798	100	10	610
010.60.2000	2178	1825	144	2110	1891	48-Ø33	8	2002	1998	132	12	1100
010.40.2000	2178	1825	144	2110	1891	48-Ø33	8	2001	1998	132	12	1100
010.60.2240	2418	2065	144	2350	2131	48-Ø33	8	2242	2238	132	12	1250
010.40.2240	2418	2065	144	2350	2131	48-Ø33	8	2241	2238	132	12	1250
010.60.2500	2678	2325	144	2610	2391	56-Ø33	8	2502	2498	132	12	1400
010.40.2500	2678	2325	144	2610	2391	56-Ø33	8	2501	2498	132	12	1400
010.60.2800	2978	2625	144	2910	2691	56-Ø33	8	2802	2798	132	12	1600
010.40.2800	2978	2625	144	2910	2691	56-Ø33	8	2802	2798	132	12	1600
010.75.3150	3376	2922	174	3286	3014	56-Ø45	8	3152	3147	162	12	2800
010.50.3150	3376	2922	174	3286	3014	56-Ø45	8	3152	3147	162	12	2800